

Smart 60 corner

GSM.0200 | GSM.0300



Ø Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)
150

% Efficiëntie
Efficiency
Efficacité
Effizienz
77,0

kW Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)
6,0

KG Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)
80








↑ Bovenansluiting
Connection top
Raccordement dessus
Anschluss oben










↔ Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

B² Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

GSM.0200
links/left/gauche

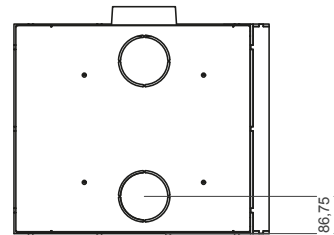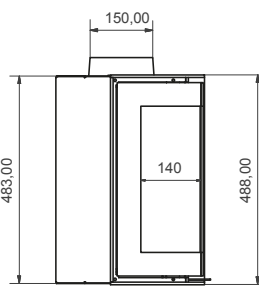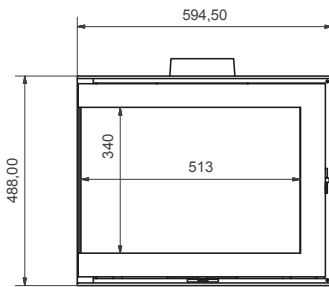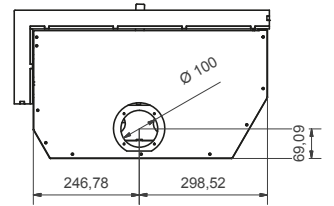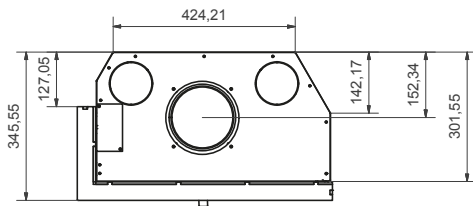

GSM.0300
rechts/right/droite

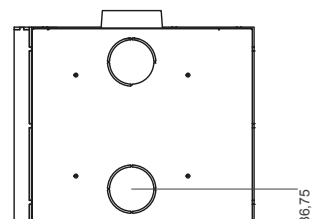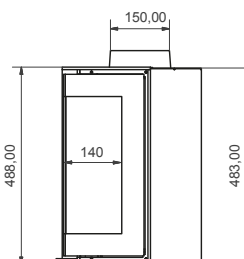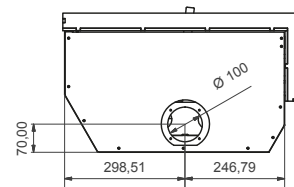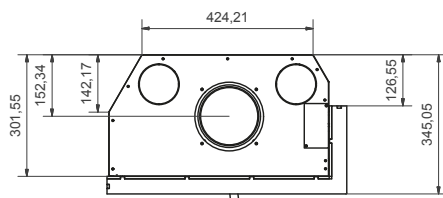

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31 (0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl



wanders
fires & stoves